


ENERGIZE THE FUTURE OF EMOBILITY

RAEDIAN

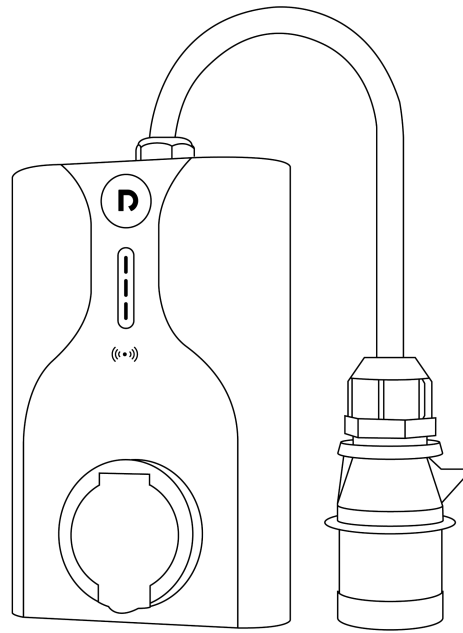

USER MANUAL

NORA

SOCKET VARIANT



Safety Notice

It's crucial to familiarize with this manual and abide by all safety precautions outlined, including those indicated by safety markings on the equipment.

General safety first While this manual provides helpful guidance, it's not exhaustive. Always prioritize general safety requirements, design, production, and established safety standards when operating the charger.

Local regulations matter Follow the specific regulations and guidelines related to EV charging installation and usage in your region along with the instructions in this manual.

Check before you install Never install or use a charger that appears defective, cracked, damaged, or malfunctioning. It's better to be safe than sorry.

Power down before install Switch off the power before installation. Before you touch the charger for any reason, turn off the upstream residual current operated circuit-breakers with integral over current protection (RCBO).

Ensure proper installation Only install the charger in environments specifically mentioned in this manual. Think of it like building a house on the right foundation to avoid future problems.

Keep water way Direct water exposure can damage the charger. Opt for a sheltered location for optimal performance and longevity.

Avoid hazardous locations Never install the charger near or in areas with flammable materials like gasoline, explosives, chemicals, or steam. Treat it like keeping lighters away from fireworks for safety!

Avoid electromagnetic interference Strong magnetic fields and wireless transmitters can disrupt the charging process. Choose a location free from such interference.

Seek shade Direct sunlight can impact the charger's performance. Opt for a shaded area for efficient charging.

Extreme weather warning Extreme weather conditions, like heavy rain, snow, or scorching heat, can compromise the charger's functionality. Avoid using it in such circumstances.

EV manual matters Before charging your specific electric vehicle with this product, always consult its manual for any additional safety instructions or compatibility detail.

Protecting the Product

- Keeping safety marks, warning signs, nameplates, and cabling marks intact ensures you have readily available safety information.
- Never insert fingers or sharp objects into any product component. Curiosity can lead to injury.
- Don't submerge the charging connector in water.
- Resist the urge to disassemble, repair, or modify the product yourself.
- Avoid dropping, squeezing, or piercing the product.
- Don't fold, crush, or damage any component with sharp objects.

Stick to your vehicle Only connect the charger to a vehicle, not other devices. Mixing and matching can lead to trouble or damages.

WARNING


This product shall only be installed, repaired or serviced by certified electricians. All applicable local, regional and national regulations for electrical installations must be followed strictly.

Notice of PIN Code







The PIN code is required for the charger register in the APP and located on the front of the quick guide, and on the back of the charger. Once the charger is registered in the APP, please reset a PIN Code.

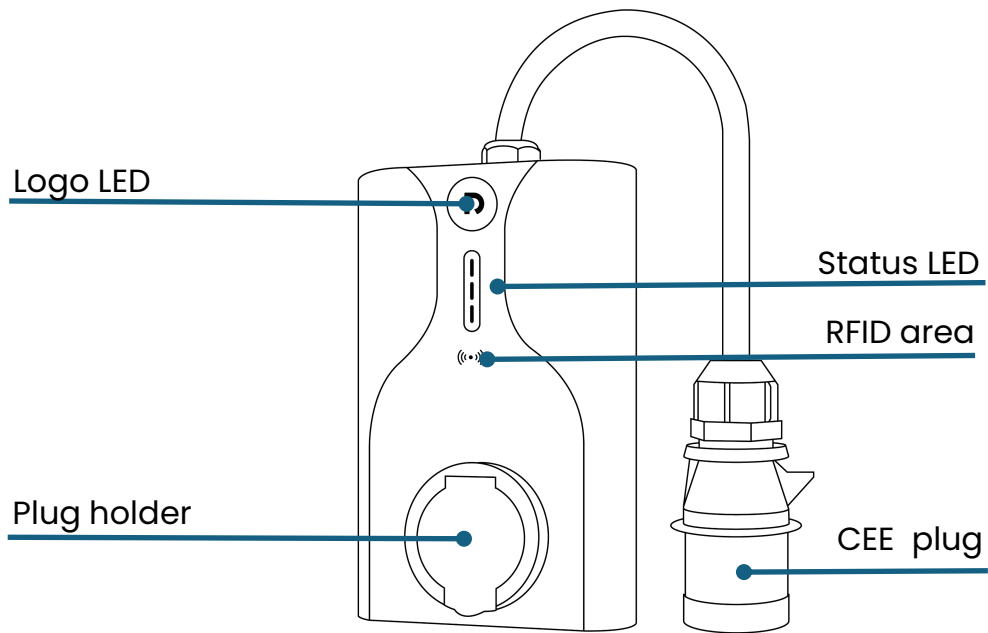The information in this document may be subject to change without prior notice.
© Copyright 2024 RAEDIAN. All rights reserved.

1. Product overview



2. Accessories

			
Travelling bag		Wall bracket X1	
			
Wall mounting screw X4	Plastic anchor X4	Security screw X2	RFID card X2

3. Specification


Feature and Function	Socket
Charging mode	AC Mode 3
Charging connector	Type 2 socket
AC power output	7/22KW
Mounting options	Wall mounted or pedestal
HMI	Logo LED, Status LED
Load management	Via APP
Communication	
Interface	Wi-Fi, BLE,4G(optional)
User authentication	RFID, APP, Plug and Charge
Backend protocol	OCPP 1.6 JSON
Software upgrade	OTA via APP, OCPP
Electrical Design	
Power supply	Single phase: 230VAC \pm 20%, 50/60Hz Three phase: 230/400VAC \pm 20%, 50/60Hz
Earthing system	TN/TT/IT
Protection	UVP, OVP, OCP, Relay Stuck, Over Temperature
RCD	Type A + 6mA d.c. per IEC 62955
Energy metering	\pm 2% Accuracy
General Design	
Operating temperature	-30 to 55°C with derating mechanism
Operating altitude	2500m
Environmental rating	Indoor and outdoor, IP55, IK10
Enclosure dimension	260x168x86 (mm)
Net weight	2.1kg

4. How to use my charger?

4.1 Power On

Power on the charger. The logo LED will be steady on after booting.

4.2 LED indicators

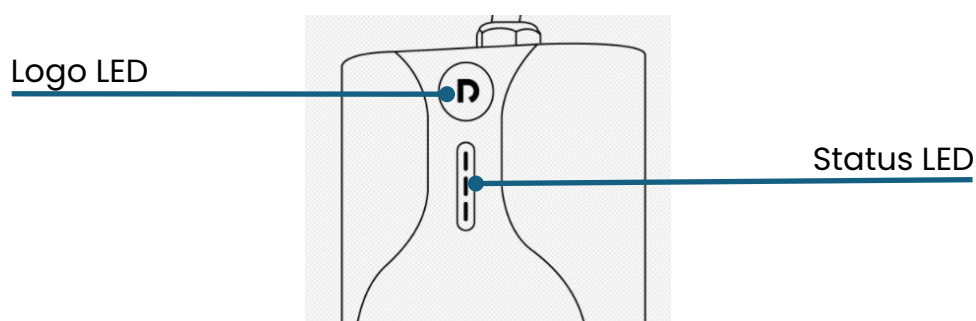

Status	Logo LED Description	Status LED Description
Standby, available for charging	White, steady	Off
Cable plugged in, waiting for authorization or waiting for EV	Blue, steady	Blue,running
Charging in progress	Cyan, breathing	Cyan, breathing
Charging complete	Cyan, steady	Cyan, steady
Error	White, steady	Red, steady

4.3 EV Charging

- Plug in the charging cable on the EV and the charger.
- Charging session will start immediately with safe start current of 10 Amp.
- Change the access and the charging current of the charger, please follow the next step to connect with your phone.

4.4 Connect with your phone

Scan the following QR code and download RAEDIAN APP. Open the Bluetooth of your mobile phone and get close to the charger and get connected.



Scan the QR code
Find out more about NORA's App

RAEDIAN

Zhejiang Raedian New Energy Technology Co., Ltd
No.3, Shuangbai Road, Yuanhua Town, Haining City, 314416
Zhejiang
China